

# Sigen Energy Gateway



- Multiple Sigen C&I inverters connections supported for micro-grid system
- Seamless switchover, ensuring 0ms load-side disruption
- Built-in bypass circuit for enhanced system reliability
- Supports diesel generator connection & smart control
- Real-time current monitoring with 100ms zero export

# Sigen Energy Gateway for Sigen C&I Inverter

Preliminary

Sigen Gateway	C600-B	C1200-B	Units
<b>Grid Connection</b>			
Grid connection type	Three phase		
Nominal AC voltage	380 ~ 400		V
Nominal AC current	912	1,824	A
Nominal AC power	600	1,200	kW
Nominal AC frequency	50 / 60		Hz
Disruption time of backup switch <sup>1</sup>	0		ms
<b>AC Output to Backup Port</b>			
Nominal AC voltage	380 ~ 400		V
Nominal AC current	912	1,824	A
Nominal AC power	600	1,200	kW
Nominal AC frequency	50 / 60		Hz
Overvoltage category	III		
<b>Inverter Connection</b>			
Number of connection ports	10	20	
Nominal AC voltage	380 ~ 400		V
Max. AC input current <sup>2</sup>	200 (6 ports), 160 (4 ports)	200 (12 ports), 160 (8 ports)	A
Max. AC power <sup>2</sup>	125 (6 ports), 80 (4 ports)	125 (12 ports), 80 (8 ports)	kW
<b>Smart Port Connection</b>			
Generator output voltage	380 ~ 400		V
Nominal AC current	912	1,824	A
Nominal AC power	600	1,200	kW
Generator 2-wire start	Supported		
<b>General Data</b>			
Dimensions (W / H / D)	1,800 / 2,300 / 1,270		mm
Weight	1,100	1,300	kg
Storage temperature range	-40 ~ 70		°C
Operating temperature range <sup>3</sup>	-30 ~ 55		°C
Relative humidity range	0% ~ 95%		
Max. operation altitude <sup>3</sup>	4,000		m
Cooling	Smart air cooling		
Ingress protection rating	IP20		
Communication	Fast Ethernet, RS485, dry contact		
Installation method	Ground-mounted		

1. This refers to the load-side disruption time, to achieve this functionality Sigen Energy Gateway needs to be used together with Sigen Hybrid Inverter and Sigen Battery. Test conditions: In the open-circuit state of the power grid, the total power of the Sigen Hybrid Inverter is higher than the total power of the backup loads.
2. This series of energy gateway has two types of molded case circuit breakers inside, please refer to the installation guide for their specific mounting locations
3. Please consult Sigenergy for detailed power derating information.

Disclaimer: The information in this file is provided on an "as is" basis. To the fullest extent permitted by law, Sigenergy Technology Co., Ltd. excludes all representations and warranties relating to this file and its contents or which is or may be provided by any affiliates or any other third party, including in

# Sigen Energy Gateway



- Multiple SigenStor connections supported for micro-grid system
- Seamless switchover, ensuring 0ms load-side disruption
- Built-in bypass circuit for enhanced system reliability
- Supports diesel generator connection & smart control
- Real-time current monitoring with 350ms anti-backflow protection

# Sigen Energy Gateway for SigenStor

Sigen Gateway	C60-2	C120-6	C180-9	C300-12	C600	C1200	Units
<b>Grid Connection</b>							
Grid connection type	Three phase						
Nominal AC voltage	380 ~ 400						
Nominal AC current	91.2	182.4	274	456	912	1,824	A
Nominal AC power	60	120	180	300	600	1,200	kW
Nominal AC frequency	50 / 60						
Disruption time of backup switch <sup>1</sup>	0						
<b>AC Output to Backup Port</b>							
Nominal AC voltage	380 ~ 400						
Nominal AC current	91.2	182.4	274	456	912	1,824	A
Nominal AC power	60	120	180	300	600	1,200	kW
Nominal AC frequency	50 / 60						
Overtoltage category	III						
<b>Inverter Connection</b>							
Number of connection ports	2	6	9	12	30	50	
Nominal AC voltage	380 ~ 400						
Nominal AC current	45.6						
<b>Smart Port Connection</b>							
Generator output voltage	380 ~ 400						
Nominal AC current	91.2	182.4	274	456	912	1,824	A
Nominal AC power	60	120	180	300	600	1,200	kW
Generator 2-wire start	Supported						
<b>General Data</b>							
Dimensions (W / H / D)	510 / 795 / 173	850 / 1,152 / 305	800 / 2,300 / 830		1,800 / 2,300 / 1,270		mm
Weight	35	74	350	400	1,100	1,300	kg
Storage temperature range	-40 ~ 70						
Operating temperature range <sup>2</sup>	-30 ~ 55						
Relative humidity range	0% ~ 100%		0% ~ 95%		0% ~ 95%		
Max. operation altitude <sup>2</sup>	4,000						
Cooling	Natural convection		Natural convection		Smart air cooling		
Ingress protection rating	IP54		IP20		IP20		
Communication	Fast Ethernet, RS485, dry contact						
Installation method	Wall-mounted		Ground-mounted		Ground-mounted		

1. This refers to the load-side disruption time, to achieve this functionality Sigen Energy Gateway needs to be used together with Sigen Energy Controller and Sigen Battery. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the backup loads.
2. Please consult Sigenenergy for detailed power derating information and customized requirements.

Disclaimer: The information in this file is provided on an "as is" basis. To the fullest extent permitted by law, Sigenenergy Technology Co., Ltd. excludes all representations and warranties relating to this file and its contents or which is or may be provided by any affiliates or any other third party, including in relation to any inaccuracies or omissions in this file.

# Sigen Energy Gateway

Modular design for flexible and precise deployment



- Multiple Sigen C&I inverters connections supported for micro-grid system
- Modular cabinet, effortless side-by-side installation
- Seamless switchover, ensuring 0ms load-side disruption
- Built-in bypass circuit for enhanced system reliability
- Supports diesel generator connection & smart control
- Real-time current monitoring with 100ms zero export

## Energy Gateway Grid Switch Cabinet <sup>1</sup>

Signen Gateway	C1600-B-GS	C2000-B-GS	C2400-B-GS	Units
Grid connection type	Three phase			
Nominal AC voltage	380 ~ 400			V
Nominal AC current	2,432	3,039	3,647	A
Nominal AC power	1,600	2,000	2,400	kW
Nominal AC frequency	50 / 60			Hz
Disruption time of backup switch <sup>2</sup>	0			ms
Dimensions (W / H / D)	800 / 2,200 / 1,000			mm
Weight	600	660	680	kg

## Energy Gateway Backup Load Cabinet


Signen Gateway	C1600-B-BL	C2000-B-BL	C2400-B-BL	Units
Nominal AC voltage	380 ~ 400			V
Nominal AC current	2,432	3,039	3,647	A
Nominal AC power	1,600	2,000	2,400	kW
Nominal AC frequency	50 / 60			Hz
Overvoltage category	III			
Dimensions (W / H / D)	800 / 2,200 / 1,000			mm
Weight	600	660	680	kg

## Energy Gateway Smart Load Cabinet (Optional)

Signen Gateway	C1600-B-ST	C2000-B-ST	C2400-B-ST	Units
Generator output voltage	380 ~ 400			V
Nominal AC current	2,432	3,039	3,647	A
Nominal AC power	1,600	2,000	2,400	kW
Generator 2-wire start	Supported			
Dimensions (W / H / D)	800 / 2,200 / 1,000			mm
Weight	600	660	680	kg

## Energy Gateway Inverter Cabinet

Signen Gateway	B-INV-15 <sup>3</sup>	B-INV-24 <sup>3</sup>	Units
Number of connection ports	15	24	
Nominal AC voltage	380 ~ 400		V
Max. AC input current per connection	200	160	A
Max. AC input power per connection	125	80	kW
Dimensions (W / H / D)	800 / 2,200 / 1,000		mm
Weight	600	660	kg

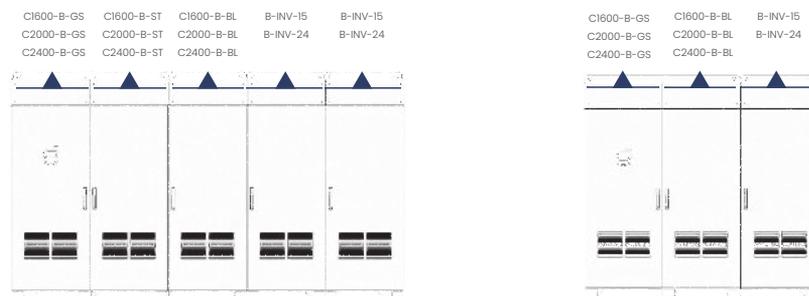

## System General Data

Storage temperature range	-40 ~ 70	°C
Operating temperature range <sup>4</sup>	-30 ~ 55	°C
Relative humidity range	0% ~ 95%	
Max. operation altitude <sup>4</sup>	4,000	m
Cooling	Smart air cooling	
Ingress protection rating	IP20	
Communication	Fast Ethernet, RS485, dry contact	
Installation method	Ground-mounted	

- Grid switch cabinets (C1600-B-GS/C2000-B-GS/C2400-B-GS), backup load cabinets (C1600-B-BL/C2000-B-BL/C2400-B-BL) and smart load cabinets (C1600-B-ST/C2000-B-ST/C2400-B-ST) must be matched exclusively within their respective series. Cross-series combinations are not compatible.
- This refers to the load-side disruption time, to achieve this functionality Signen Energy Gateway needs to be used together with Signen Hybrid Inverter and Signen Battery. Test conditions: In the open-circuit state of the power grid, the total power of the Signen Hybrid Inverter is higher than the total power of the backup loads.
- Signen Gateway B-INV-15 supports the connection of 15 inverters. Signen Gateway B-INV-24 supports the connection of 24 inverters. The two types of cabinets can be deployed in combination to expand inverter connection capacity.
- Please consult Signenergy for detailed power derating information.
- In accordance with IEC 60364-4-43, if the existing load-side distribution cabinet is already fitted with overload protection device and is installed within 3 m of Signen Energy Gateway, a back load cabinet is not required, and a combiner panel cabinet (Signen Gateway B-CP) can be selected.
- If the inverter connection ports of inverter cabinets are insufficient, expansion and customization via a combiner panel cabinet (Signen Gateway B-CP) are available. Please consult Signenergy for details.